


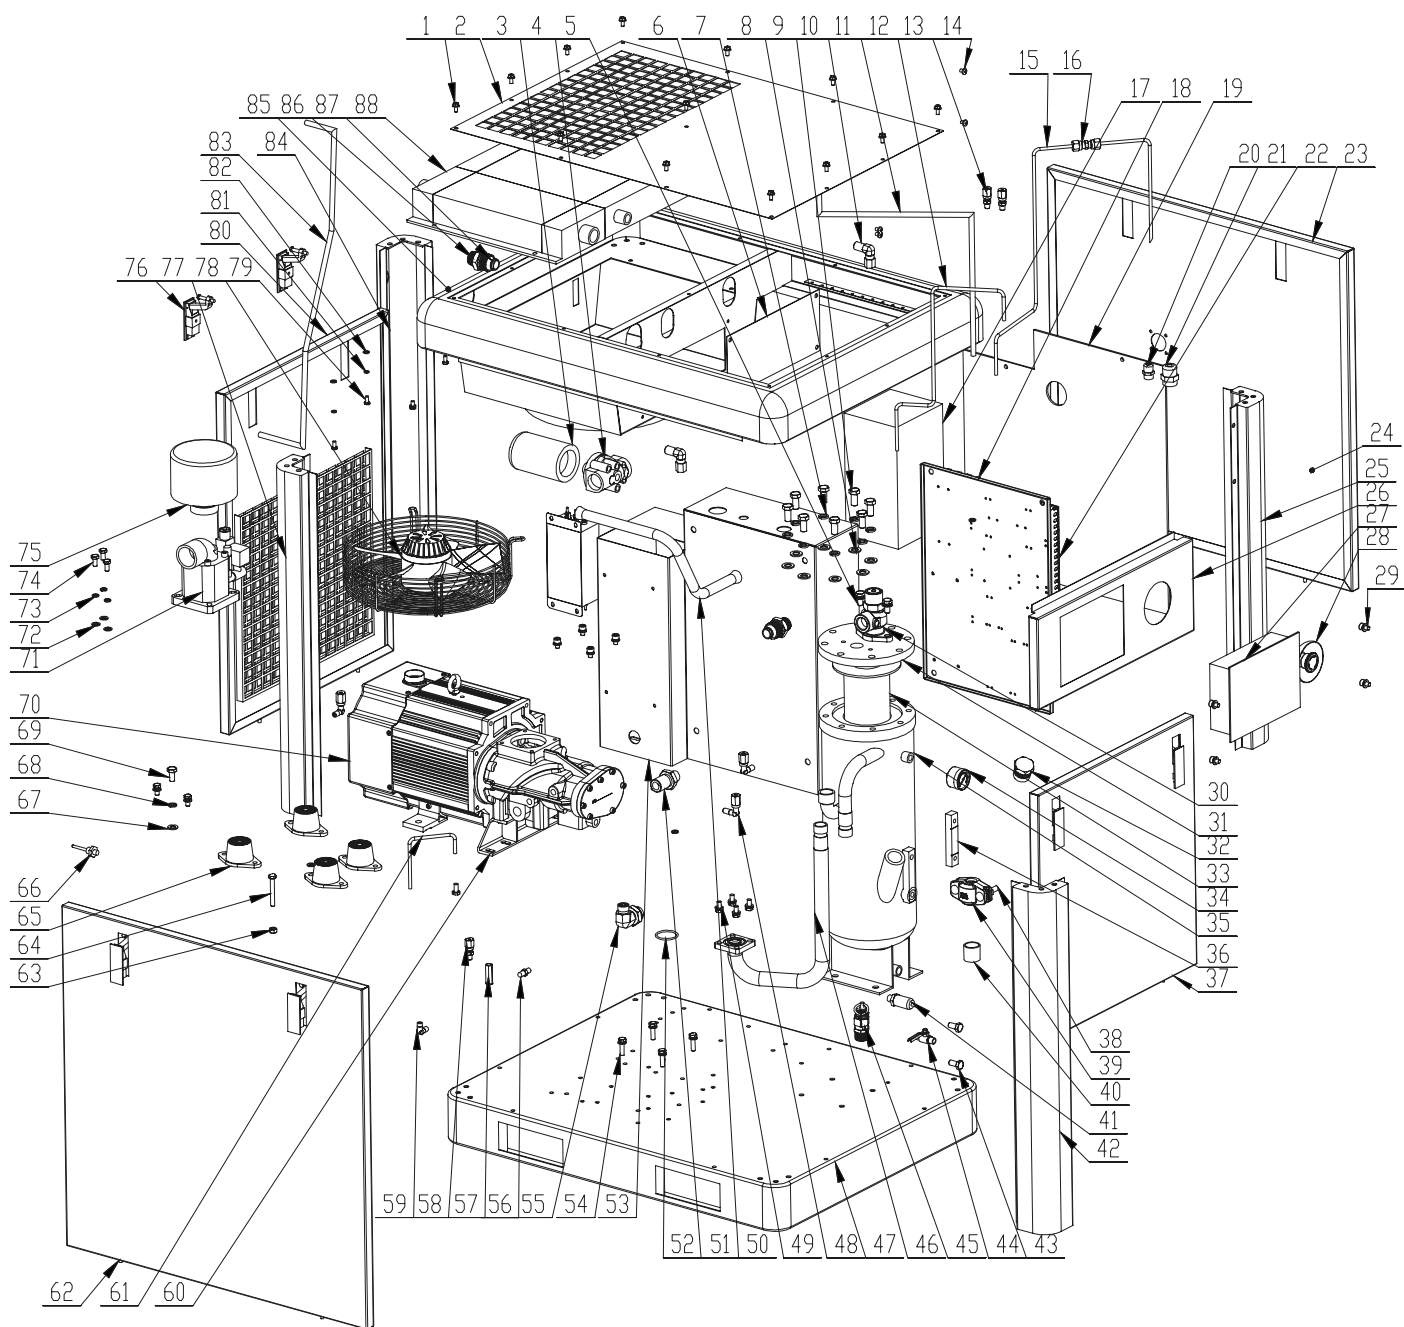

part no.	ref. code	DESIGNATION	Model/Specification	Quantity
1	36940701	outer hexagon screw with flange	M6×10	13
2	36940702	Head cover plate	cold rolled steel plate/δ1.5	1
3	36940703	Oil filter	W719	1
4	36940704	Oil filter base	Rp3/4-Rp3/4-M24×1.5	1
5	36940705	outer hexagon bolt	M8×25	2
6	36940706	Fan cover plate	Cold rolled steel plate/δ1.2	1
7	36940707	spring washer	Ø12	8
8	36940708	flat gasket	Ø12	8
9	36940709	outer hexagon bolt	M12×35	8
10	36940710	90°adjustable connector	90 degree G3/8-Ø10	3
11	36940711	Barrels of oil pipe	Ø10	1
12	36940712	Solenoid valve connecting pipe	Ø6	1
13	36940713	Adjustable Connector	0 degree R1/4-Ø6	2
14	36940714	cross recessed pan head screw	M6×10	
15	36940715	oil return pipe of air end	Ø6	1
16	36940716	straight connector	Ø6 straight connector-Ø6 straight connector	1
17	36940717	inverter	Z2000T-5R5GY-4	1
18	36940718	electric control panel	cold rolled steel plate/δ1.5	1
19	36940719	plate for electric control system	acylic plate	1
20	36940720	The fan can not pull off	PG9	1
21	36940721	Control line can not pull off	PG21	1
22	36940722	electric control system	XPMS112-08	1
23	36940723	right shutter	Cold rolled steel plate/δ1.2	1
24	36940724	sponge		1
25	36940725	Vertical shaft on right side r	cold rolled steel plate/δ1.5	1
26	36940726	Main controller fixed plate	cold rolled steel plate/δ1.5	1
27	36940727	controller	6080M	1
28	36940728	Emergency "stop" button	LAY5-BS544	1
29	36940729	inside hexagonal bolt	M8×25	20
30	36940730	Minimum pressure valve	MPV-20K	1
31	36940731	Flange cover of oil-gas barrel	Ø180×18	1
32	36940732	oil cock	M27×1.5	1
33	36940733	oil-gas separator	Ø135×Ø90×40×140	1
34	36940734	Φ 50 Pressure gauge of the oil-gas barrel	Ø50, R1/4	1
35	36940735	oil-gas barrel	3316(simple specification Ø180×418)	1
36	36940736	oil level sight glass	114×22×20 (Center hole distance 80)	1
37	36940737	Front shutter	Cold rolled steel plate/δ1.2	1
38	36940738	Egg neck bolt	M10×45	2
39	36940739	clamp	3/4	1
40	36940740	clamp ring	MFQ-GC-01	1
41	36940741	pressure sensor	R1/4	1
42	36940742	Vertical shaft on left side of the front shutter	cold rolled steel plate/δ1.5	1
43	36940743	outer hexagon bolt	M10×35(with oil hole)	2
44	36940744	Ball valve	R1/4-Rp1/4	1
45	36940745	CE authentication safety valve	R1/2	3
46	36940746	Exhausting pipe of handpiece	Ø28	1
47	36940747	base plate	cold rolled steel plate/δ3	1
48	36940748	90°adjustable connector	90 degree R1/8-Ø6	3
49	36940749	outer hexagon bolt	M8×30	4
50	36940750	Exhausting pipe of oil tank	Ø20	1
51	36940751	straight connector	R1/2-G3/4	1
52	36940752	O seal ring	at the air end exhaust flange	1
53	36940753	frequency conversion electric control box	cold rolled steel plate/δ1.5	1
54	36940754	outer hexagon bolt	M8×30	4

part no.	ref. code	DESIGNATION	Model/Specification	Quantity
55	36940755	90°adjustable connector	90 degree G3/4-Ø10	1
56	36940756	straight connector	R1/8-R1/4	1
57	36940757	oil return valve	Rp1/8-Rp1/8	1
58	36940758	straight connector	0 degree R1/8-Ø6	1
59	36940759	right-angle bend	90 degree R1/8-Rp1/8	1
60	36940760	Host frame	square steel 60×40	1
61	36940761	Bearing lubrication return oil pipe	Ø6	1
62	36940762	left shutter	Cold rolled steel plate/δ1.2	1
63	36940763	hexagon nut	M8	15
64	36940764	outer hexagon bolt	M8×70	2
65	36940765	Cushioning washer	RM-60	4
66	36940766	Temperature sensor	PT100(detector 35mm)	1
67	36940767	flat gasket φ10	Ø10	10
68	36940768	spring washer φ10	Ø10	10
69	36940769	outer hexagon bolt	M10×35	4
70	36940770	Screw handpiece	5.5KW	1
71	36940771	Air inlet valve	AIV-25Y-K	1
72	36940772	flat gasket φ8	Ø8	65
73	36940773	spring washer φ8	Ø8	65
74	36940774	outer hexagon bolt	M8×25	50
75	36940775	air filter	Ø109XØ41X80X40 Ø135X85	1
76	36940776	lock	MS719Z1A020002	8
77	36940777	Vertical shaft on left side of the back shutter	cold rolled steel plate/δ1.5	1
78	36940778	Cooling fan	YWF(K)2D300-Z	1
79	36940779	outer hexagon bolt	M6×20	4
80	36940780	Back shutter	Cold rolled steel plate/δ1.2	1
81	36940781	spring washer φ6	Ø6	4
82	36940782	flat gasket φ6	Ø6	4
83	36940783	Fine oil differentiating return pipe	Ø10	1
84	36940784	Vertical shaft on right side of the back shutter	cold rolled steel plate/δ1.5	1
85	36940785	Head cover	cold rolled steel plate/δ1.5	1
86	36940786	straight connector	90 degree R3/4-M33×2 (24 degree joint)	1
87	36940787	O seal ring	19×2	1
88	36940788	plate-fin heat exchanger	472×370×65mm	1